


# Standard Rectifier Module

| 1~<br>Rectifier |          |
|-----------------|----------|
| $V_{RRM}$       | = 1600 V |
| $I_{DAV}$       | = 70 A   |
| $I_{FSM}$       | = 750 A  |


## 1~ Rectifier Bridge

Part number

**VBO72-16NO7**

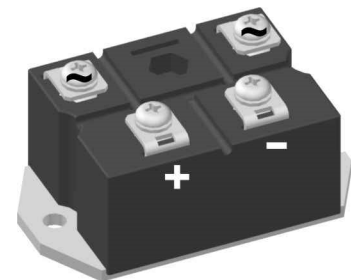

 E72873



### Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

### Applications:

- Diode for main rectification
- For one phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

### Package: PWS-D


- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Easy to mount with two screws
- Base plate: Copper internally DCB isolated
- Advanced power cycling

### Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

| Rectifier  |                                              |                                                   |                                             | Ratings                        |      |      |                   |
|------------|----------------------------------------------|---------------------------------------------------|---------------------------------------------|--------------------------------|------|------|-------------------|
| Symbol     | Definition                                   | Conditions                                        |                                             | min.                           | typ. | max. | Unit              |
| $V_{RSM}$  | max. non-repetitive reverse blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$                     |                                             |                                |      | 1700 | V                 |
| $V_{RRM}$  | max. repetitive reverse blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$                     |                                             |                                |      | 1600 | V                 |
| $I_R$      | reverse current                              | $V_R = 1600\text{ V}$                             | $T_{VJ} = 25^{\circ}\text{C}$               |                                |      | 100  | $\mu\text{A}$     |
|            |                                              | $V_R = 1600\text{ V}$                             | $T_{VJ} = 150^{\circ}\text{C}$              |                                |      | 1.5  | mA                |
| $V_F$      | forward voltage drop                         | $I_F = 30\text{ A}$                               | $T_{VJ} = 25^{\circ}\text{C}$               |                                |      | 1.08 | V                 |
|            |                                              | $I_F = 60\text{ A}$                               |                                             |                                |      | 1.22 | V                 |
|            |                                              | $I_F = 30\text{ A}$                               | $T_{VJ} = 125^{\circ}\text{C}$              |                                |      | 0.99 | V                 |
|            |                                              | $I_F = 60\text{ A}$                               |                                             |                                |      | 1.17 | V                 |
| $I_{DAV}$  | bridge output current                        | $T_C = 110^{\circ}\text{C}$<br>rectangular        | $T_{VJ} = 150^{\circ}\text{C}$<br>$d = 0.5$ |                                |      | 70   | A                 |
| $V_{F0}$   | threshold voltage                            | } for power loss calculation only                 |                                             | $T_{VJ} = 150^{\circ}\text{C}$ |      | 0.78 | V                 |
| $r_F$      | slope resistance                             |                                                   |                                             |                                |      | 6    | m $\Omega$        |
| $R_{thJC}$ | thermal resistance junction to case          |                                                   |                                             |                                |      | 0.9  | K/W               |
| $R_{thCH}$ | thermal resistance case to heatsink          |                                                   |                                             |                                | 0.4  |      | K/W               |
| $P_{tot}$  | total power dissipation                      | $T_C = 25^{\circ}\text{C}$                        |                                             |                                |      | 135  | W                 |
| $I_{FSM}$  | max. forward surge current                   | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 45^{\circ}\text{C}$               |                                |      | 750  | A                 |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                          |                                |      | 810  | A                 |
|            |                                              | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 150^{\circ}\text{C}$              |                                |      | 640  | A                 |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                          |                                |      | 690  | A                 |
| $I^2t$     | value for fusing                             | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 45^{\circ}\text{C}$               |                                |      | 2.82 | kA <sup>2</sup> s |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                          |                                |      | 2.73 | kA <sup>2</sup> s |
|            |                                              | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 150^{\circ}\text{C}$              |                                |      | 2.05 | kA <sup>2</sup> s |
|            |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$                          |                                |      | 1.98 | kA <sup>2</sup> s |
| $C_J$      | junction capacitance                         | $V_R = 400\text{ V}; f = 1\text{ MHz}$            |                                             |                                | 27   |      | pF                |

| Package PWS-D |                                                              |                      |                                     | Ratings |      |      |      |
|---------------|--------------------------------------------------------------|----------------------|-------------------------------------|---------|------|------|------|
| Symbol        | Definition                                                   | Conditions           |                                     | min.    | typ. | max. | Unit |
| $I_{RMS}$     | RMS current                                                  | per terminal         |                                     |         |      | 150  | A    |
| $T_{VJ}$      | virtual junction temperature                                 |                      |                                     | -40     |      | 150  | °C   |
| $T_{op}$      | operation temperature                                        |                      |                                     | -40     |      | 125  | °C   |
| $T_{stg}$     | storage temperature                                          |                      |                                     | -40     |      | 125  | °C   |
| <b>Weight</b> |                                                              |                      |                                     |         | 153  |      | g    |
| $M_D$         | mounting torque                                              |                      |                                     | 4.25    |      | 5.75 | Nm   |
| $M_T$         | terminal torque                                              |                      |                                     | 4.25    |      | 5.75 | Nm   |
| $d_{Spp/Apb}$ | creepage distance on surface   striking distance through air | terminal to terminal |                                     | 9.5     |      |      | mm   |
| $d_{Spb/Apb}$ |                                                              | terminal to backside |                                     | 26.0    |      |      | mm   |
| $V_{ISOL}$    | isolation voltage                                            | t = 1 second         | 50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA | 3000    |      |      | V    |
|               |                                                              | t = 1 minute         |                                     | 2500    |      |      | V    |

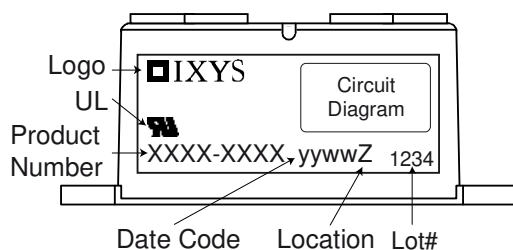


| Ordering | Ordering Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-----------------|--------------------|---------------|----------|----------|
| Standard | VBO72-16NO7     | VBO72-16NO7        | Box           | 10       | 471240   |

### Equivalent Circuits for Simulation

\* on die level

$T_{VJ} = 150^{\circ}\text{C}$

|                                                                                     |                    |                  |    |
|-------------------------------------------------------------------------------------|--------------------|------------------|----|
|  |                    | <b>Rectifier</b> |    |
| $V_{0\max}$                                                                         | threshold voltage  | 0.78             | V  |
| $R_{0\max}$                                                                         | slope resistance * | 4.8              | mΩ |

Technical drawing of a mechanical part, showing top and side views with dimensions.

**Top View Dimensions:**


- Overall width: 72
- Overall height: 42
- Top section width (left to right): 60, 54
- Top section height (left to right): 20, 20
- Top section width (left to right): 2,5, 18, 2,5
- Bottom section width (left to right): 23, 10
- Bottom section height (left to right): 2,5, 5,3, 13,3
- Bottom section width (left to right): 48
- Bottom section height (left to right): 21,6, 5,3
- Bottom section width (left to right): 2,5, 10, 2,5
- Bottom section height (left to right): 2,5, 5,3, 13,3
- Bottom section width (left to right): 48
- Bottom section height (left to right): 21,6, 5,3
- Bottom section width (left to right): 2,5, 10, 2,5
- Bottom section height (left to right): 2,5, 5,3, 13,3

**Side View Dimensions:**

- Overall width: 30
- Overall height: 7
- Top section width (left to right): 2,5, 5,3, 13,3
- Top section height (left to right): 2,5, 5,3, 13,3
- Bottom section width (left to right): 2,5, 5,3, 13,3
- Bottom section height (left to right): 2,5, 5,3, 13,3

**Other Features:**

- Top view shows a central hexagonal feature and two circular features on the left and right sides.
- Side view shows a rectangular feature with a circular feature on the right side.
- Material: M5



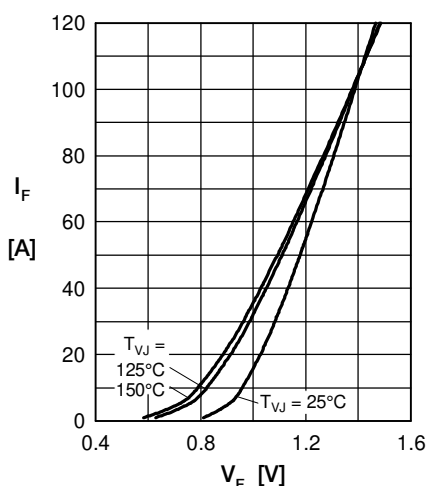
**Rectifier**


Fig. 1 Forward current versus voltage drop per diode

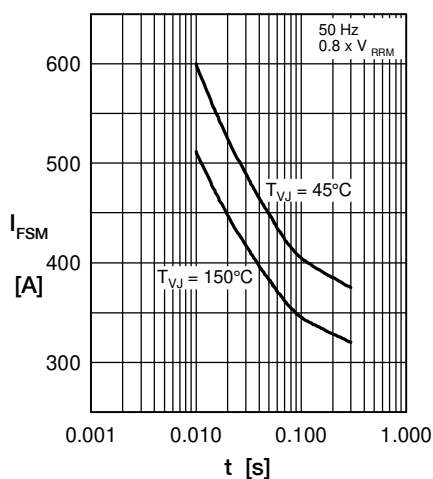


Fig. 2 Surge overload current

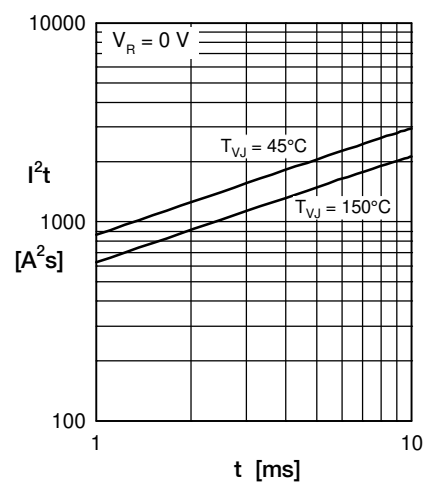
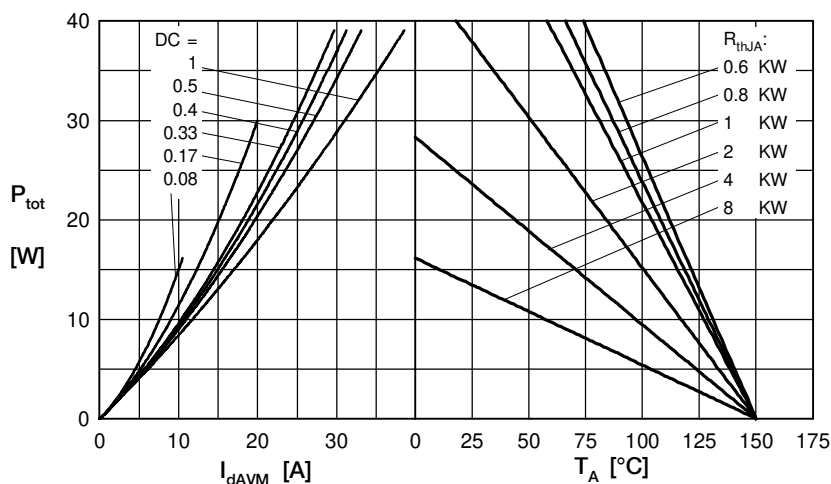

 Fig. 3  $I^2t$  versus time per diode


Fig. 4 Power dissipation vs. direct output current &amp; ambient temperature

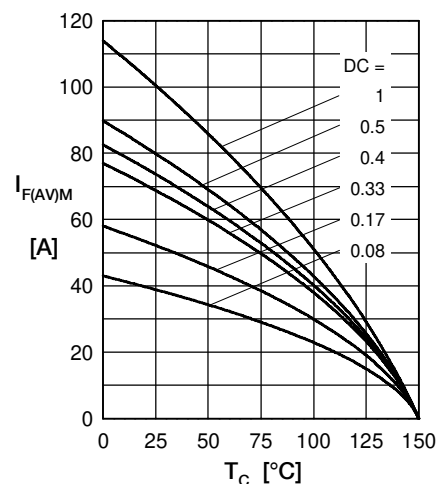


Fig. 5 Max. forward current vs. case temperature

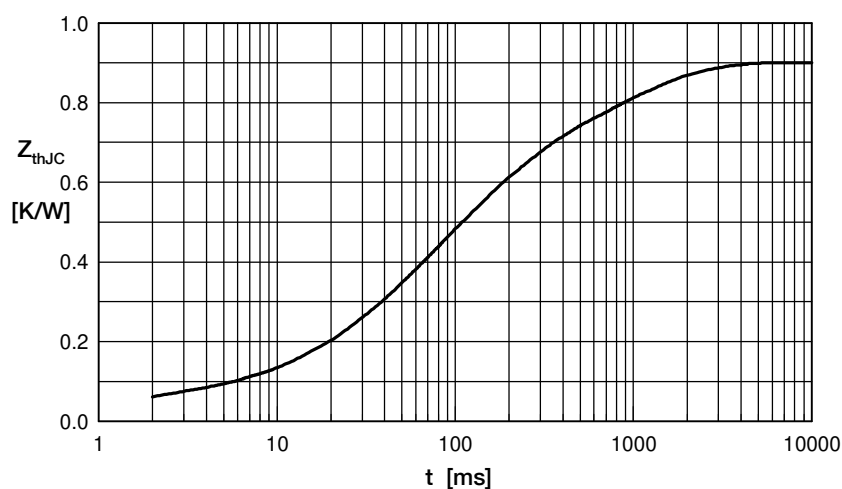


Fig. 6 Transient thermal impedance junction to case

 Constants for  $Z_{thJC}$  calculation:

| i | $R_{th}$ (K/W) | $t_i$ (s) |
|---|----------------|-----------|
| 1 | 0.05           | 0.001     |
| 2 | 0.14           | 0.030     |
| 3 | 0.18           | 0.070     |
| 4 | 0.28           | 0.150     |
| 5 | 0.25           | 0.950     |