



AS ENERGI

Thyristor Modules MTx110



$I_{T(AV)}$ 110A
 V_{DRM}/V_{RRM} 600~1800V
 I_{TSM} $2.8A \times 10^3$
 I^2t $39A^2 S \times 10^3$

Features:

- Isolated mounting base 2500V~
- Pressure contact technology with increased power cycling capability
- Space and weight savings

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | $T_J(^{\circ}C)$ | VALUE | | | UNIT |
|------------------------|--|---|------------------|-------|------|-------|--------------------|
| | | | | Min | Type | Max | |
| $I_{T(AV)}$ | Mean on-state current | 180° half sine wave 50Hz Single side cooled, $T_c=85^{\circ}C$ | 125 | | | 110 | A |
| $I_{T(RMS)}$ | RMS on-state current | | 125 | | | 173 | A |
| V_{DRM} V_{RRM} | Repetitive peak off-state voltage Repetitive peak reverse voltage | $V_{DRM} \& V_{RRM}$ tp=10ms $V_{DSM} \& V_{RSM} = V_{DRM} \& V_{RRM} + 100V$ respectively | 125 | 600 | | 1800 | V |
| I_{DRM} I_{RRM} | Repetitive peak current | at V_{DRM} at V_{RRM} | 125 | | | 12 | mA |
| I_{TSM} | Surge on-state current | 10ms half sine wave $V_R=60\%V_{RRM}$ | 125 | | | 2.80 | KA |
| I^2t | I^2T for fusing coordination | | | | | 39 | $A^2s \times 10^3$ |
| V_{TO} | Threshold voltage | | 125 | | | 0.8 | V |
| r_T | On-state slop resistance | | | | | 2.29 | $m\Omega$ |
| V_{TM} | Peak on-state voltage | $I_{TM}=330A$ | 25 | | | 1.69 | V |
| dv/dt | Critical rate of rise of off-state voltage | $V_{DM}=67\%V_{DRM}$ | 125 | | | 800 | $V/\mu s$ |
| di/dt | Critical rate of rise of on-state current | Gate source 1.5A $t_r \leq 0.5\mu s$ Repetitive | 125 | | | 100 | $A/\mu s$ |
| I_{GT} | Gate trigger current | $V_A=12V$, $I_A=1A$ | 25 | 30 | | 100 | mA |
| V_{GT} | Gate trigger voltage | | | 1.0 | | 2.5 | V |
| I_H | Holding current | | | 20 | | 120 | mA |
| V_{GD} | Non-trigger gate voltage | $V_{DM}=67\%V_{DRM}$ | 125 | 0.2 | | | V |
| $R_{th(j-c)}$ | Thermal resistance Junction to case | Single side cooled | | | | 0.250 | $^{\circ}C/W$ |
| $R_{th(c-h)}$ | Thermal resistance case to heatsink | Single side cooled | | | | 0.15 | $^{\circ}C/W$ |
| V_{iso} | Isolation voltage | 50Hz,R.M.S,t=1min, $I_{iso}:1mA(MAX)$ | 2500 | | | | V |
| F_m | Thermal connection torque(M5) | | | | 4.0 | | $N \cdot m$ |
| | Mounting torque(M6) | | | | 6.0 | | $N \cdot m$ |
| T_{stg} | Stored temperature | | -40 | | | 125 | $^{\circ}C$ |
| W_t | Weight | | | | 160 | | g |
| Outline | | | | | | | |

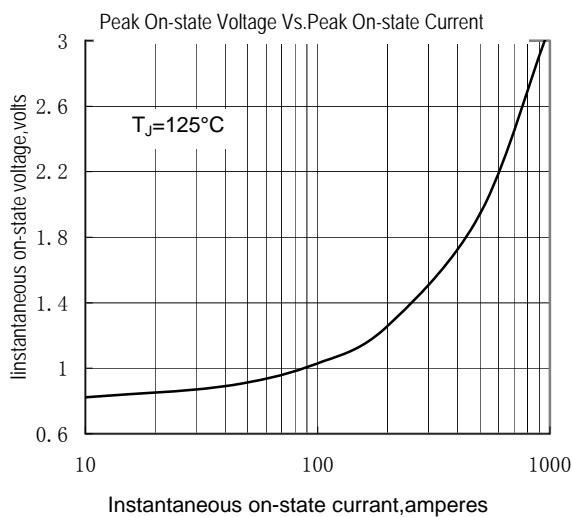


Fig.1

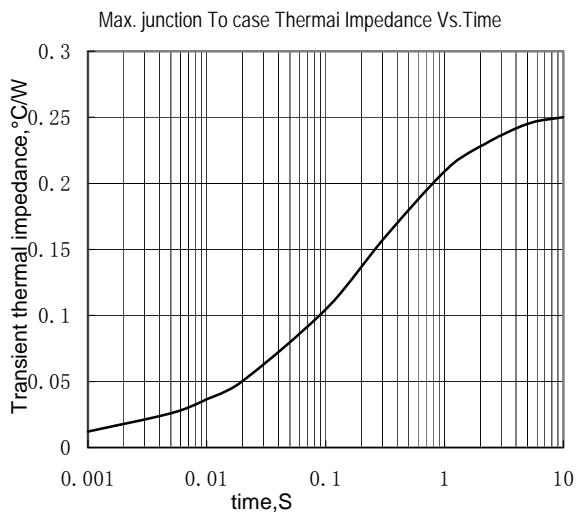


Fig.2

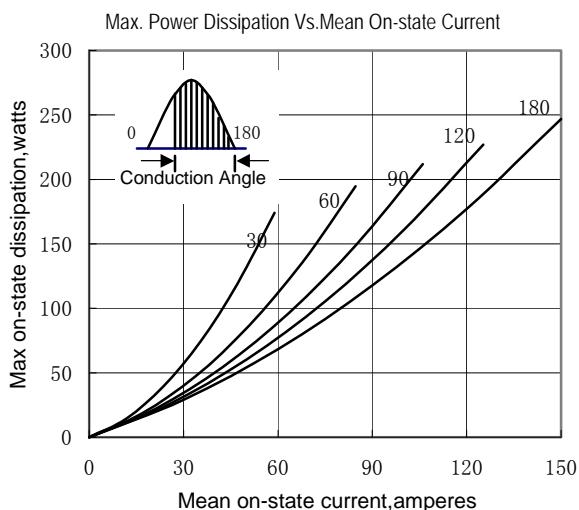


Fig.3

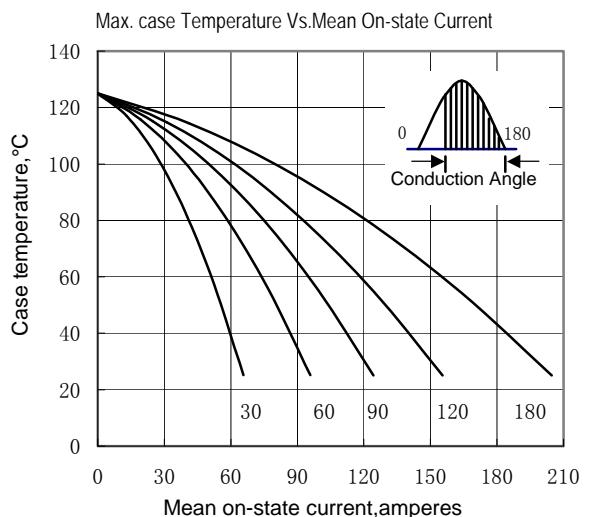


Fig.4

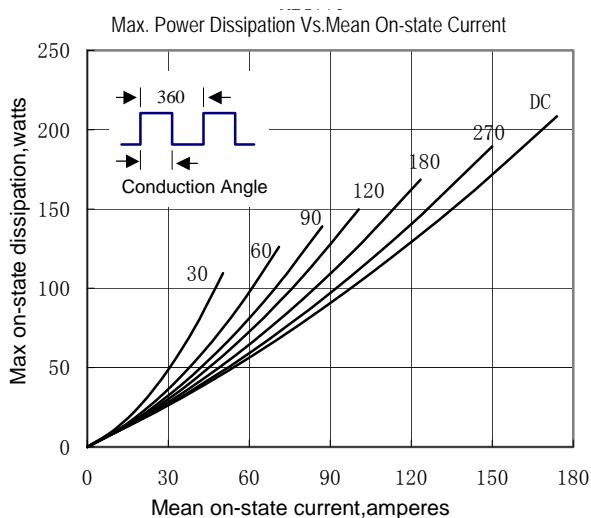


Fig.5

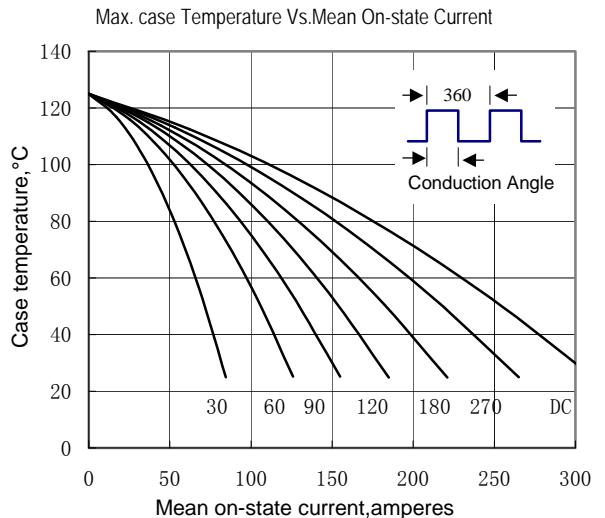


Fig.6

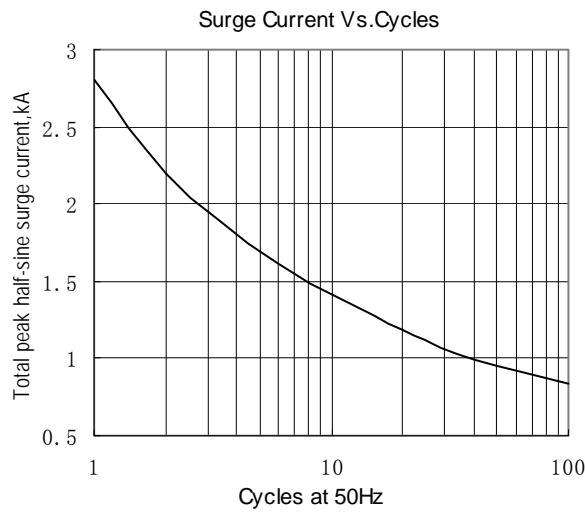


Fig.7

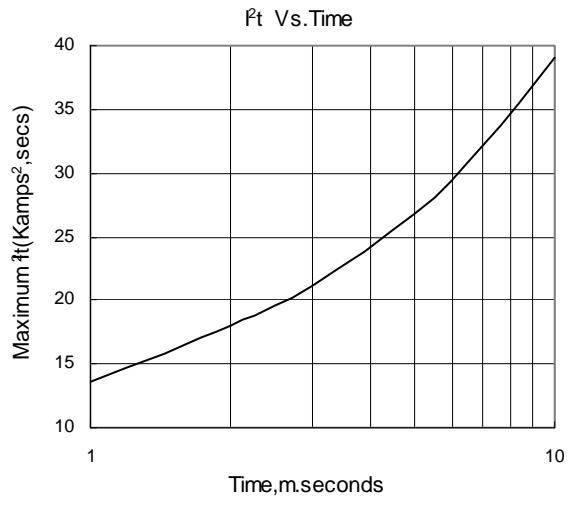


Fig.8

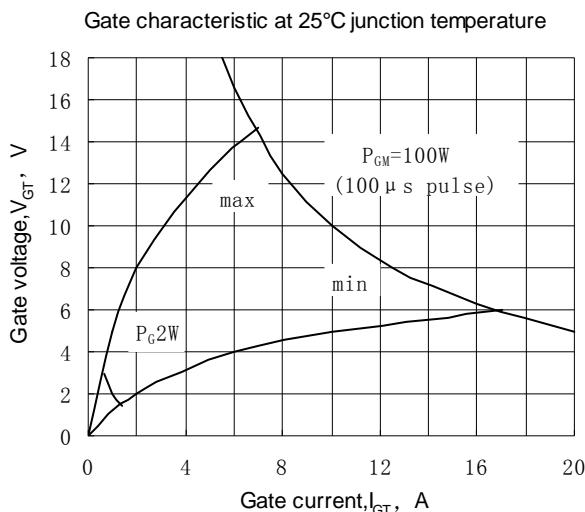


Fig.9

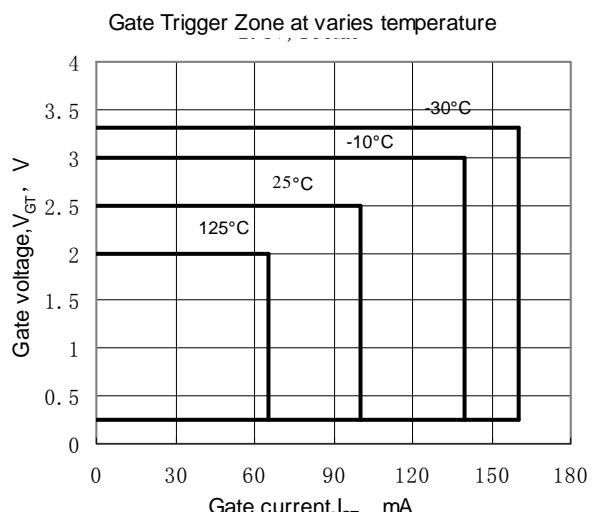


Fig.10

Outline:

