



AS ENERGI

# Thyristor Modules MTx300



**$I_{T(AV)}$**  300A  
 **$V_{DRM}/V_{RRM}$**  600~1800V  
 **$I_{TSM}$**   $9.2A \times 10^3$   
 **$I^2t$**   $423A^2 S \cdot 10^3$

## Features:

- Isolated mounting base 2500V~
- Pressure contact technology with increased power cycling capability
- Space and weight savings

## Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

| SYMBOL                 | CHARACTERISTIC   | TEST CONDITIONS   | $T_f(^{\circ}C)$ | VALUE |      |       | UNIT              |
|------------------------|--|---|------------------|-------|------|-------|-------------------|
|                        |  |   |                  | Min   | Type | Max   |                   |
| $I_{T(AV)}$            | Mean on-state current  | 180° half sine wave 50Hz<br>Single side cooled, $T_c=85^{\circ}C$                             | 125              |       |      | 300   | A                 |
| $I_{T(RMS)}$           | RMS on-state current   |   | 125              |       |      | 471   | A                 |
| $V_{DRM}$<br>$V_{RRM}$ | Repetitive peak off-state voltage<br>Repetitive peak reverse voltage | $V_{DRM} \& V_{RRM}$ tp=10ms<br>$V_{DSM} \& V_{RSM} = V_{DRM} \& V_{RRM} + 100V$ respectively | 125              | 600   |      | 1800  | V                 |
| $I_{DRM}$<br>$I_{RRM}$ | Repetitive peak current  | at $V_{DRM}$<br>at $V_{RRM}$  | 125              |       |      | 35    | mA                |
| $I_{TSM}$              | Surge on-state current   | 10ms half sine wave   | 125              |       |      | 9.2   | KA                |
| $I^2t$                 | $I^2T$ for fusing coordination                                       | $V_R=60\%V_{RRM}$   |                  |       |      | 423   | $A^2s \cdot 10^3$ |
| $V_{TO}$               | Threshold voltage  |   | 125              |       |      | 0.80  | V                 |
| $r_T$                  | On-state slop resistance   |   |                  |       |      | 0.72  | $m\Omega$         |
| $V_{TM}$               | Peak on-state voltage  | $I_{TM}=900A$   | 25               |       |      | 1.58  | V                 |
| $dv/dt$                | Critical rate of rise of off-state voltage                           | $V_{DM}=67\%V_{DRM}$  | 125              |       |      | 800   | $V/\mu s$         |
| $di/dt$                | Critical rate of rise of on-state current                            | Gate source 1.5A<br>$t_r \leq 0.5\mu s$ Repetitive  | 125              |       |      | 100   | $A/\mu s$         |
| $I_{GT}$               | Gate trigger current   |   | 25               | 30    |      | 180   | mA                |
| $V_{GT}$               | Gate trigger voltage   | $V_A=12V, I_A=1A$   |                  | 1.0   |      | 2.5   | V                 |
| $I_H$                  | Holding current  |   |                  | 20    |      | 180   | mA                |
| $V_{GD}$               | Non-trigger gate voltage   | $V_{DM}=67\%V_{DRM}$  | 125              | 0.2   |      |       | V                 |
| $R_{th(j-c)}$          | Thermal resistance<br>Junction to case                               | Single side cooled  |                  |       |      | 0.100 | $^{\circ}C / W$   |
| $R_{th(c-h)}$          | Thermal resistance<br>case to heatsink                               | Single side cooled  |                  |       |      | 0.04  | $^{\circ}C / W$   |
| $V_{iso}$              | Isolation voltage  | 50Hz,R.M.S, t=1min, $I_{iso}:1mA(MAX)$  | 2500             |       |      |       | V                 |
| $F_m$                  | Thermal connection torque(M10)                                       |   |                  |       | 12.0 |       | $N \cdot m$       |
|                        | Mounting torque(M6)  |   |                  |       | 6.0  |       | $N \cdot m$       |
| $T_{stg}$              | Stored temperature   |   | -40              |       |      | 125   | $^{\circ}C$       |
| $W_t$                  | Weight   |   |                  |       | 1350 |       | g                 |
| Outline                |  |   |                  |       |      |       |                   |

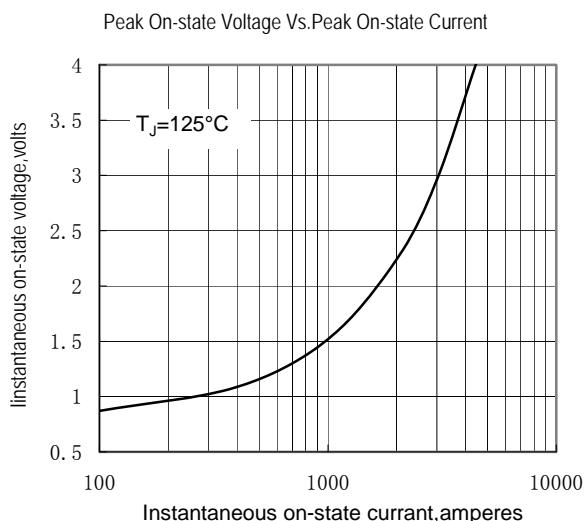


Fig.1

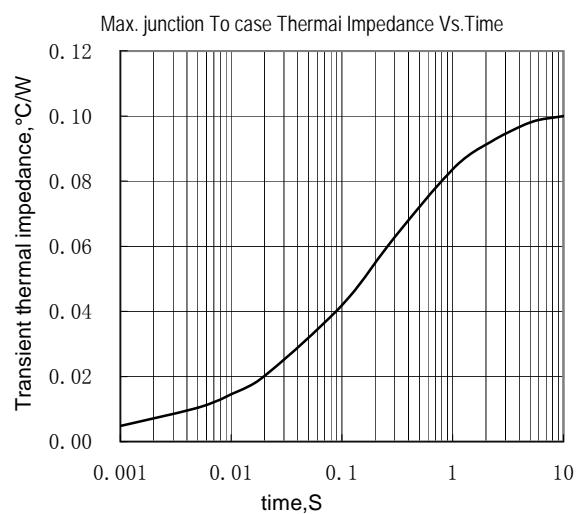


Fig.2

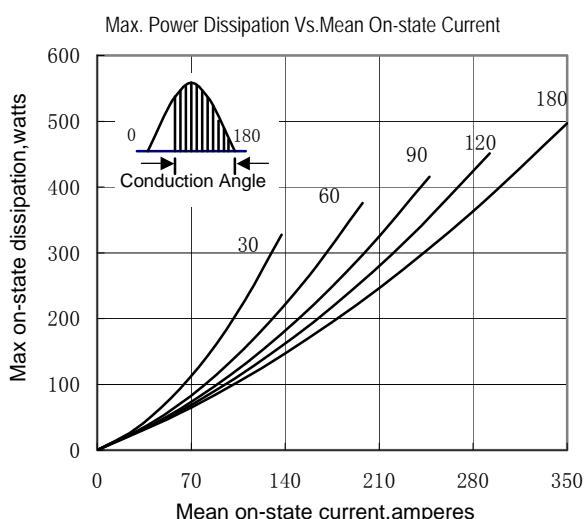


Fig.3

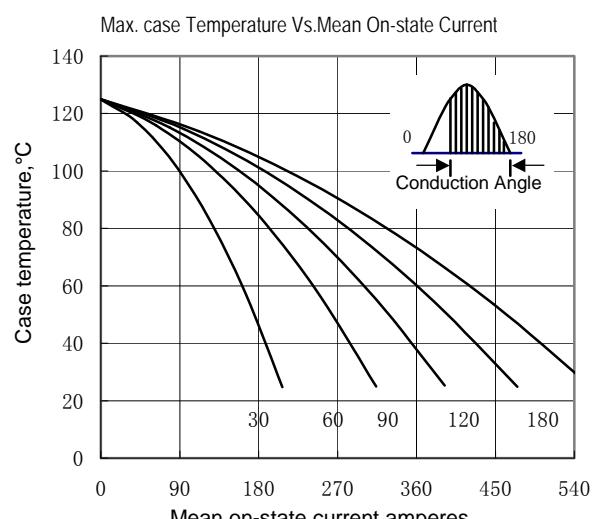


Fig.4

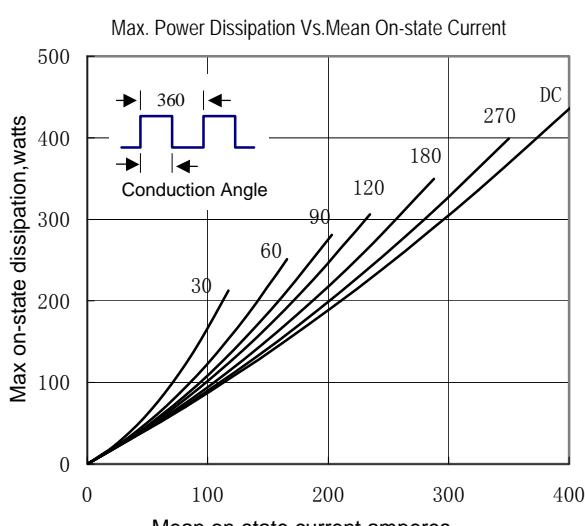


Fig.5

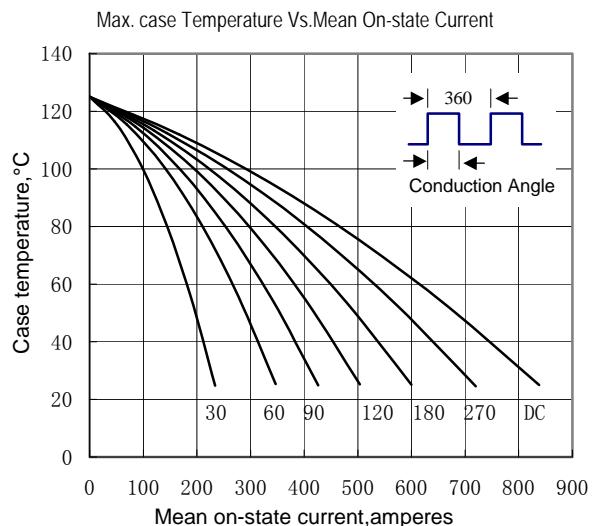


Fig.6

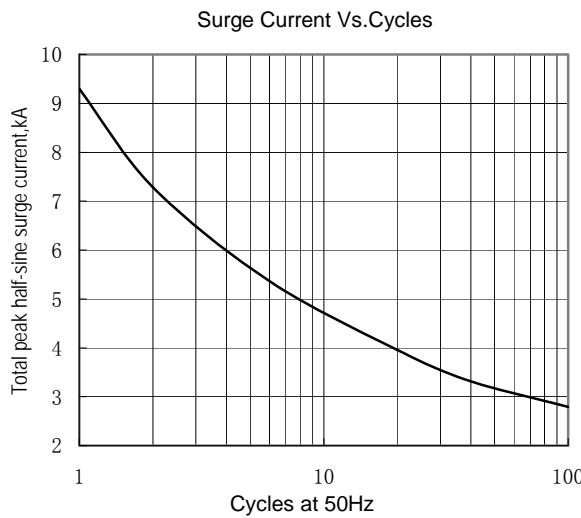


Fig.7

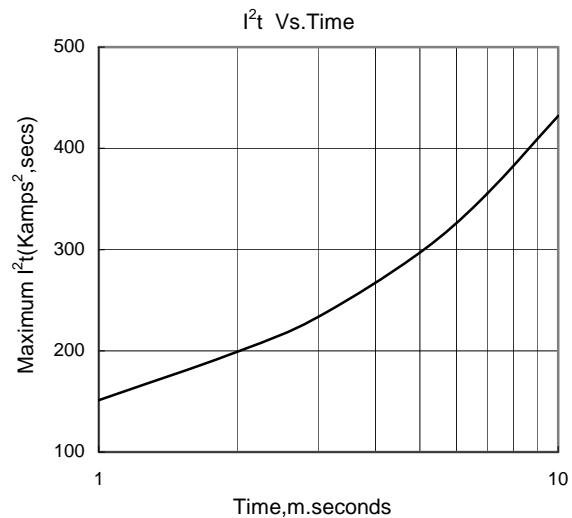


Fig.8

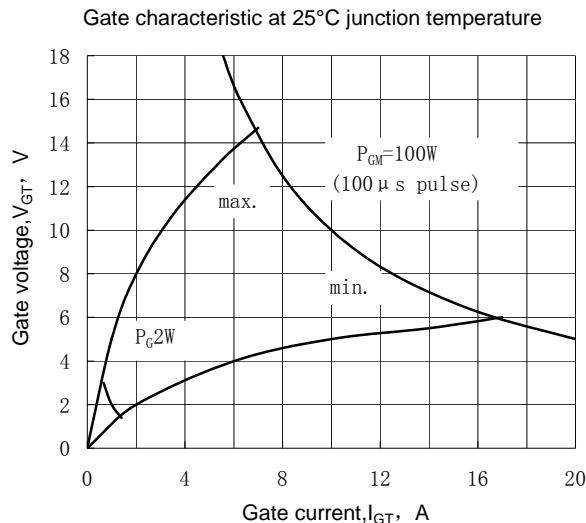


Fig.9

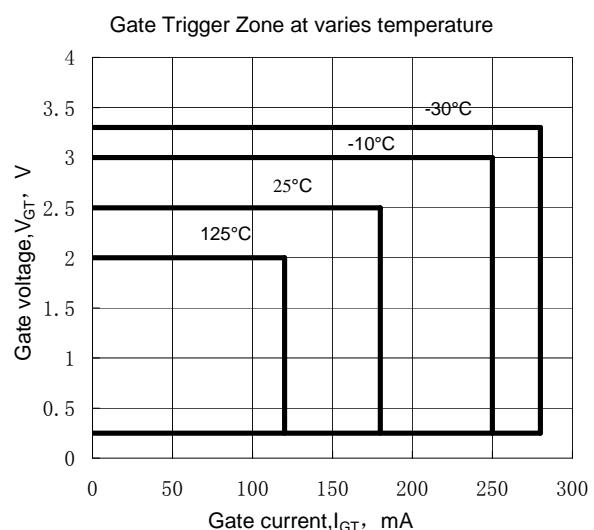


Fig.10

### Outline:

