



High Frequency Thyristor KA 1100A 800~1200V



Features:

- Interdigitated amplifying gates
- Fast turn-on and high dI/dt
- Low switching losses
- Short turn-off time
- Hermetic metal cases with ceramic insulators

I_{T(AV)} 1100A
V_{DRM/V_{RRM}} 800~1200V
t_q 10~20μs
I_{TSM} 11kA

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz	125			1100	A
		Double side cooled, T _C =85°C				750	
V _{DRM} V _{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V _{DRM} &V _{RRM} ,tp=10ms V _{DSM} &V _{RSM} = V _{DRM} &V _{RRM} +100V	125	800		1200	V
I _{DRM} I _{RRM}	Repetitive peak off-state current Repetitive peak reverse current	V _D = V _{DRM} V _R = V _{RRM}	125			60	mA
I _{TSM}	Surge on-state current	10ms half sine wave	125			11	kA
I ² t	I ² T for fusing coordination	V _R =0.6V _{RRM}				605	A ² s*10 ³
V _{TO}	Threshold voltage		125			1.41	V
r _T	On-state slop resistance					0.45	mΩ
V _{TM}	Peak on-state voltage	I _{TM} =2400A, F=21kN	125			2.49	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}	125			200	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} to 1800A, Gate pulse t _r ≤0.5μs I _{GM} =1.5A	125			1500	A/μs
Q _{rr}	Recovery charge	I _{TM} =1000A,tp=2000μs, di/dt=-60A/μs,V _R =50V	125		63	80	μC
t _q	Circuit commutated turn-off time	I _{TM} =1000A,tp=1000μs, V _R =50V dv/dt=30V/μs ,di/dt=-20A/μs	125	10		20	μs
I _{GT}	Gate trigger current	V _A =12V, I _A =1A	25		30		mA
V _{GT}	Gate trigger voltage			0.8		3.0	V
I _H	Holding current			20		400	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}	125	0.3			V
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 21kN				0.035	°C /W
R _{th(c-h)}	Thermal resistance case to heat sink					0.006	
F _m	Mounting force				20		kN
T _{stg}	Stored temperature			-40		140	°C
W _t	Weight				370		g
Outline							

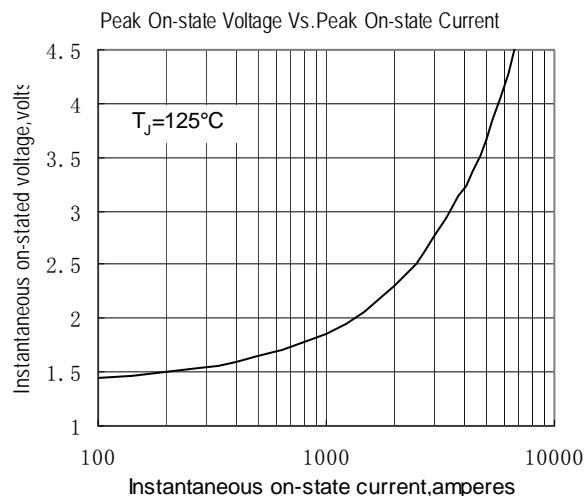


Fig.1

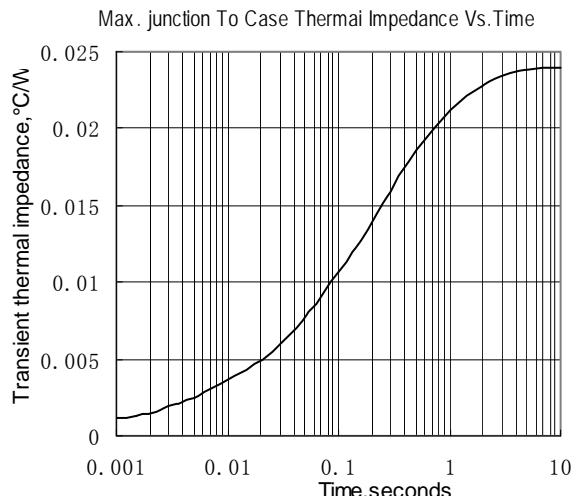


Fig.2

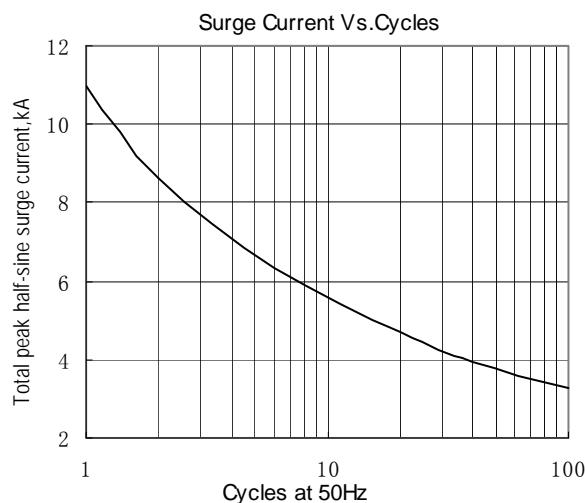


Fig.3

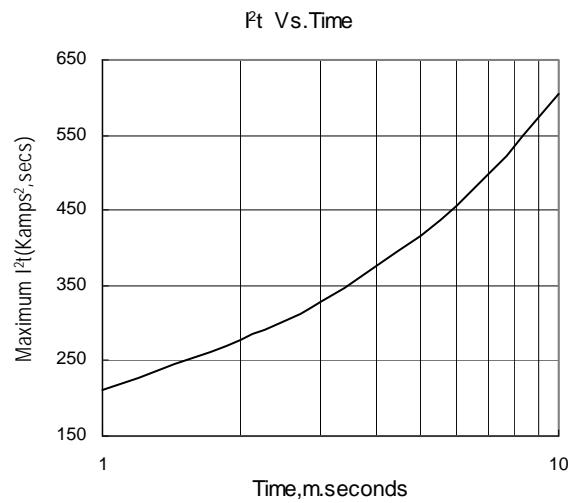


Fig.4

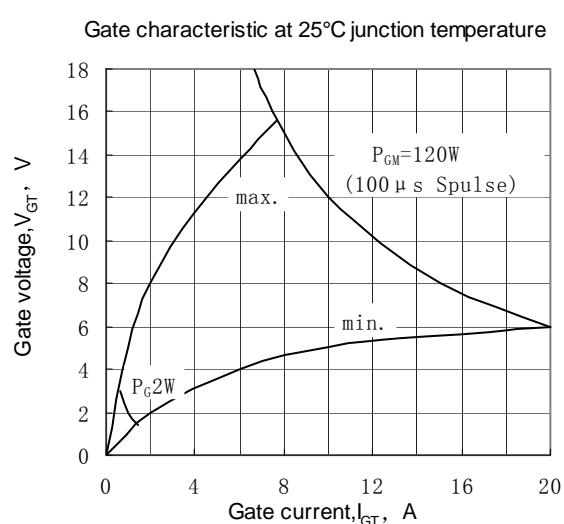


Fig.5


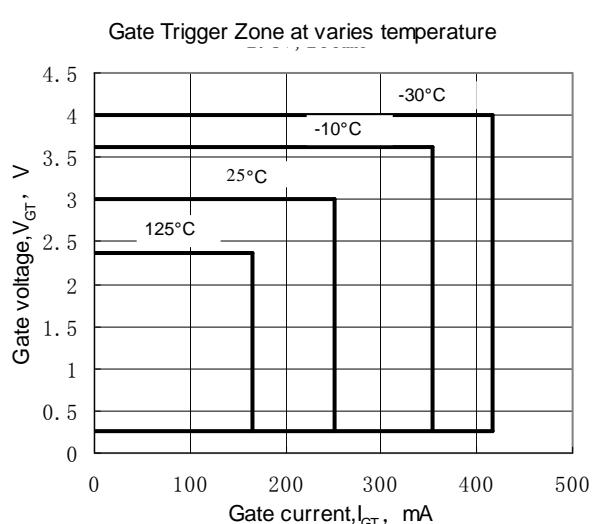


Fig.6

OUTLINE

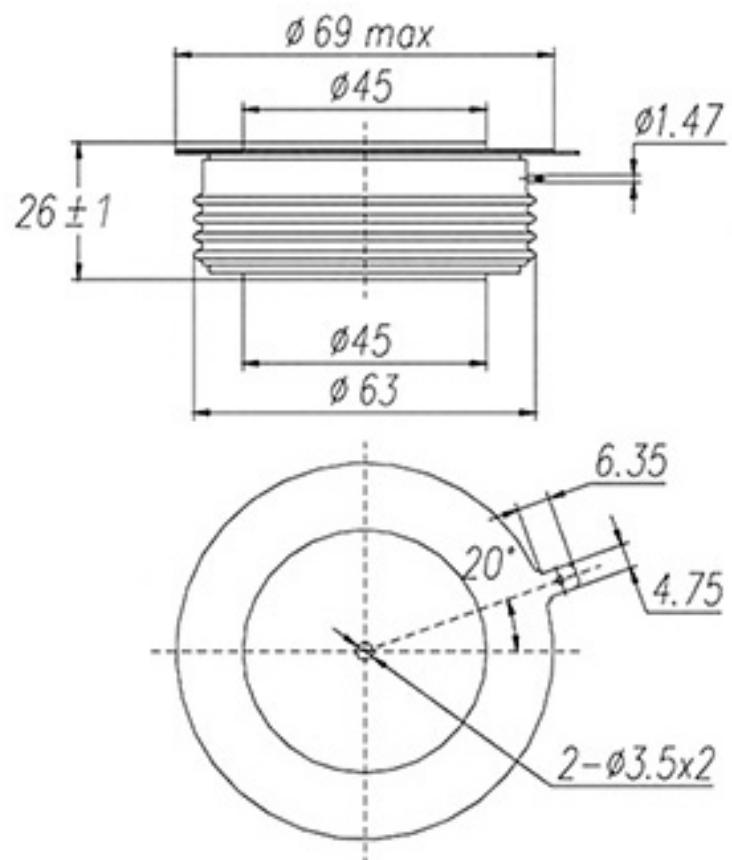

Dimensions in mm