



Thyristor Modules MTx400



AS ENERGI

I_{T(AV)} 400A
V_{DRM/V_{RRM}} 2600~3600V
I_{TSM} 12.5A×10³
I²t 781A² S·10³

Features:

- Isolated mounting base 3600V~
- Pressure contact technology with increased power cycling capability
- Space and weight savings

Typical Applications

- AC/DC Motor drives
- Various rectifiers
- DC supply for PWM inverter

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Single side water cooled, T _c =55°C	125			400	A
I _{T(RMS)}	RMS on-state current		125			628	A
V _{DRM} V _{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V _{DRM} &V _{RRM} tp=10ms V _{DsM} &V _{RsM} = V _{DRM} &V _{RRM} +100V respectively	125	2600		3600	V
I _{DRM} I _{RRM}	Repetitive peak current	at V _{DRM} at V _{RRM}	125			50	mA
I _{TSM}	Surge on-state current	10ms half sine wave V _R =60%V _{RRM}	125			12.5	KA
I ² t	I ² T for fusing coordination					781	A ² s*10 ³
V _{TO}	Threshold voltage		125			1.12	V
r _T	On-state slop resistance					1.25	mΩ
V _{TM}	Peak on-state voltage	I _{TM} =1200A	25			2.85	V
dv/dt	Critical rate of rise of off-state voltage	V _{DM} =67%V _{DRM}	125			800	V/μs
di/dt	Critical rate of rise of on-state current	Gate source 1.5A t _r ≤0.5μs Repetitive	125			100	A/μs
I _{GT}	Gate trigger current	V _A =12V, I _A =1A	25	30		200	mA
V _{GT}	Gate trigger voltage			1.0		3.0	V
I _H	Holding current			20		200	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}	125	0.2			V
R _{th(j-c)}	Thermal resistance Junction to case	Single side cooled				0.073	°C /W
R _{th(c-h)}	Thermal resistance case to heat sink	Single side cooled				0.04	°C /W
V _{iso}	Isolation voltage	50Hz,R.M.S,t=1min,I _{iso} :1mA(MAX)	3600				V
F _m	Thermal connection torque(M8)				12		N·m
	Mounting torque(M6)				6.0		N·m
T _{stg}	Stored temperature			-40		125	°C
W _t	Weight				1820		g
Outline							

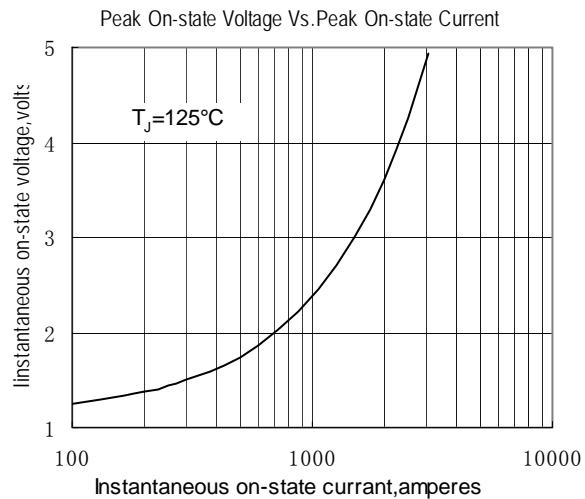


Fig.1

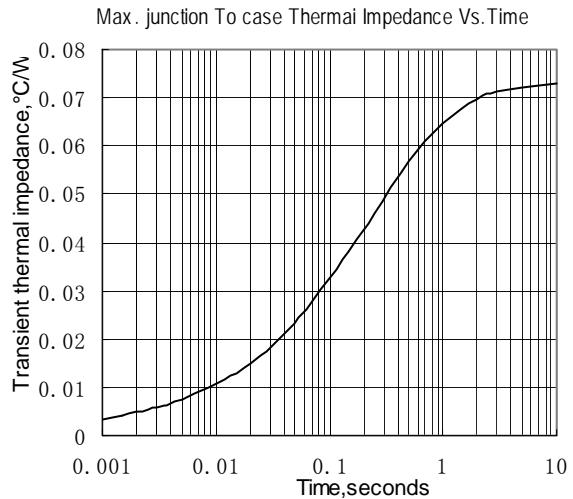


Fig.2

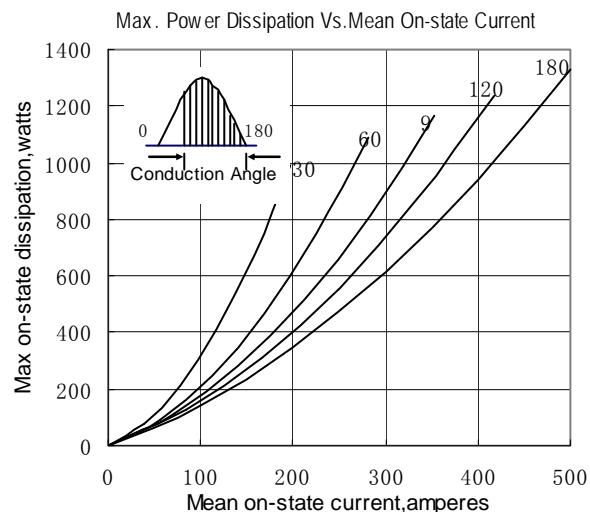


Fig.3

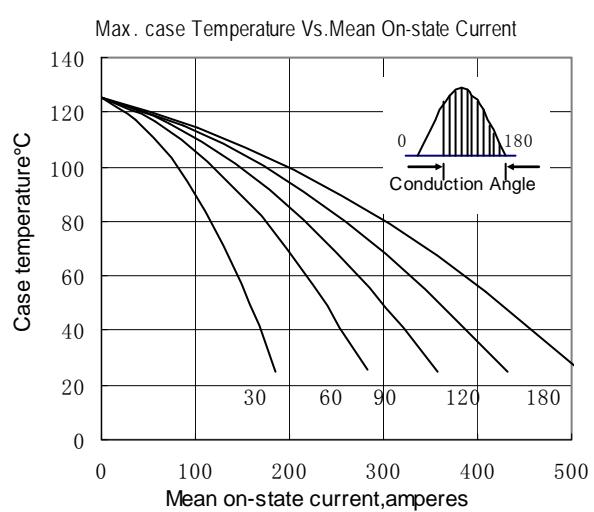


Fig.4

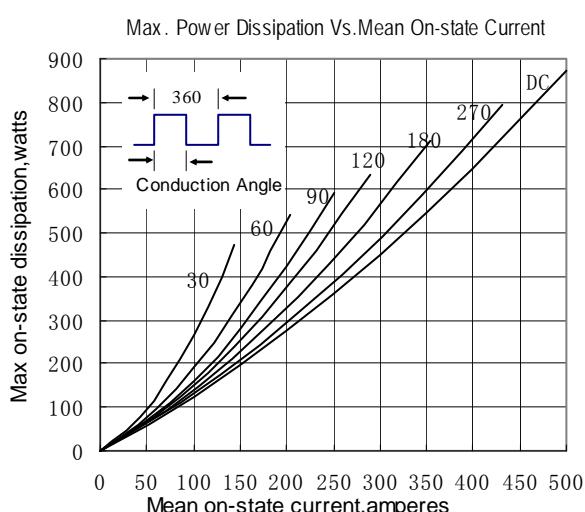


Fig.5

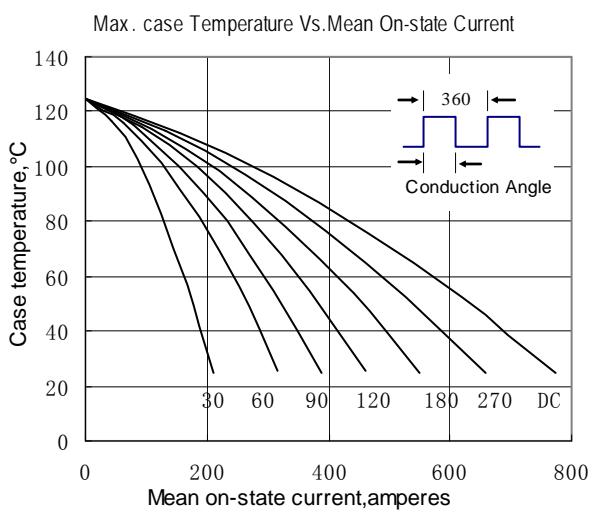


Fig.6

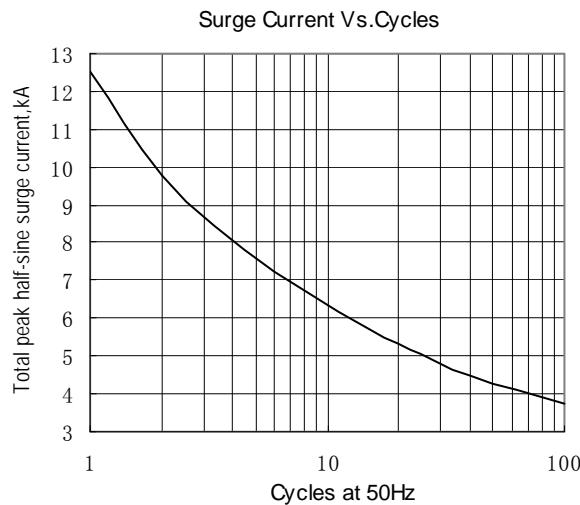


Fig.7

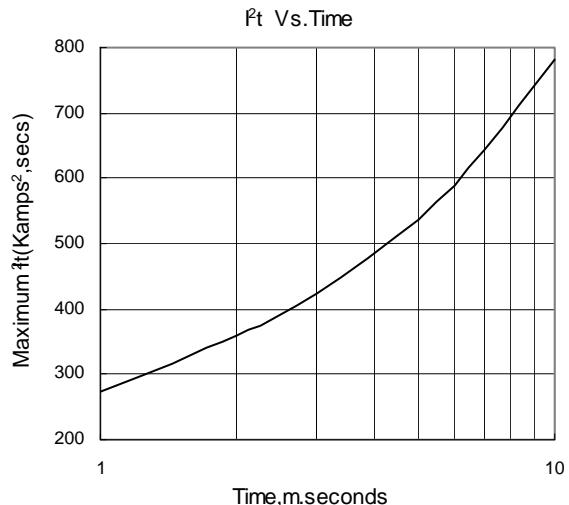


Fig.8

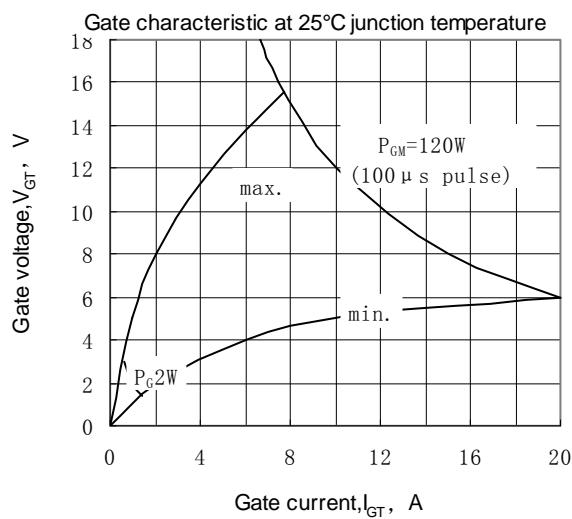


Fig.9

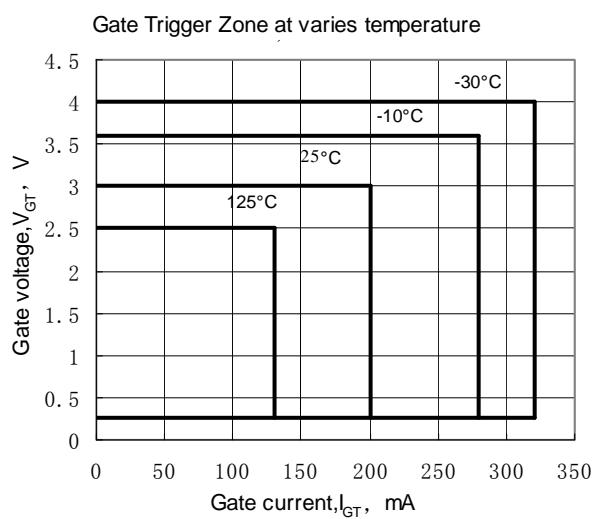


Fig.10

Outline:

